

VOLTAGE COMPARATORS

- MAXIMUM INPUT CURRENT : 150nA
- MAXIMUM OFFSET CURRENT : 20nA
- DIFFERENTIAL INPUT VOLTAGE RANGE : $\pm 30V$
- POWER CONSUMPTION : 135mW AT $\pm 15V$
- SUPPLY VOLTAGE : +5V TO $\pm 15V$
- OUTPUT CURRENT : 50mA

DESCRIPTION

The LM111, LM211, LM311 are voltage comparators that have low input currents.

They are also designed to operate over a wide range of supply voltages : from standard $\pm 15V$ operational amplifier supplies down to the single +5V supply used for IC logic.


Their output is compatible with RTL-DTL and TTL as well as MOS circuits and can switch voltages up to +50V at outputs currents as high as 50mA.

ORDER CODE

Part Number	Temperature Range	Package	
		N	D
LM111	-55°C, +125°C	•	•
LM211	-40°C, +105°C	•	•
LM311	0°C, +70°C	•	•
Example : LM311D			

N = Dual in Line Package (DIP)

D = Small Outline Package (SO) - also available in Tape & Reel (DT)




N
DIP8



D
SO8

PIN CONNECTIONS (top view)













- | | |
|-------------------------|--------------------|
| 1 - Ground | 5 - Balance |
| 2 - Non-inverting input | 6 - Strobe/Balance |
| 3 - Inverting input | 7 - Output |
| 4 - V_{CC}^- | 8 - V_{CC}^+ |







1. This rating applies for $\pm 15\text{V}$ supplies. The positive input voltage limit is 30V above the negative. The negative input voltage is equal to the negative supply voltage or 30V below the positive supply, whichever is less.
2. P_d is calculated with $T_{\text{amb}} = +25^\circ\text{C}$, $T_j = +150^\circ\text{C}$ and $R_{\text{thja}} = 100^\circ\text{C/W}$ for DIP8 package
 $ = 175^\circ\text{C/W}$ for SO8 package

2/9

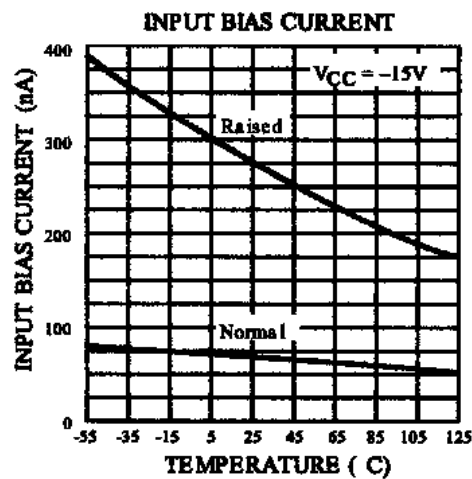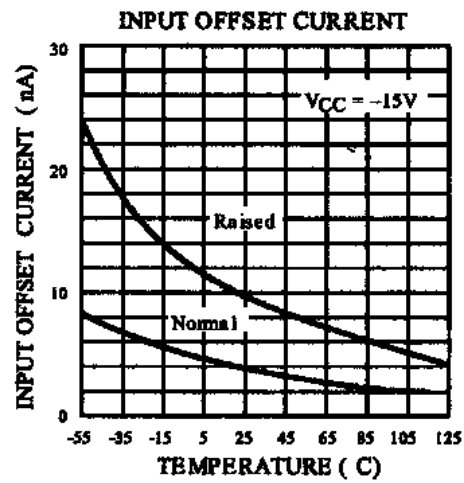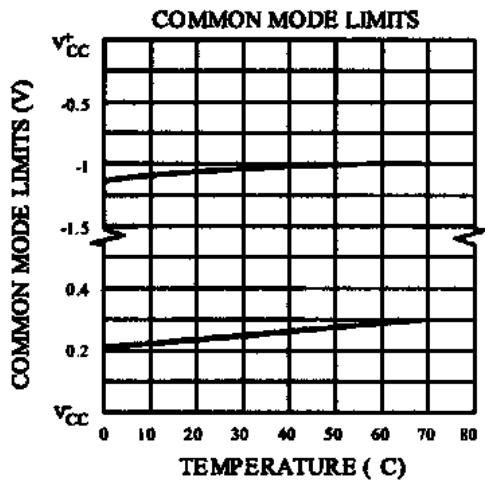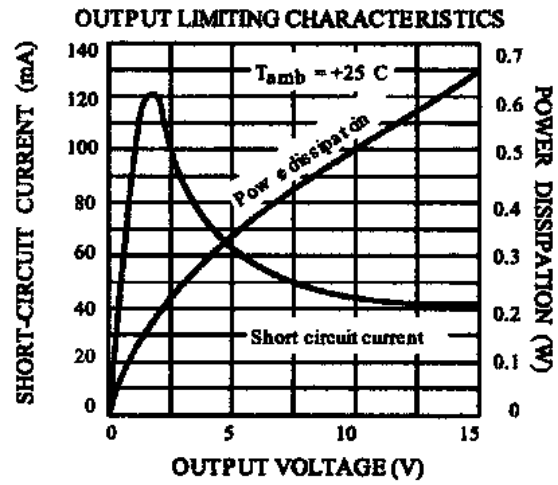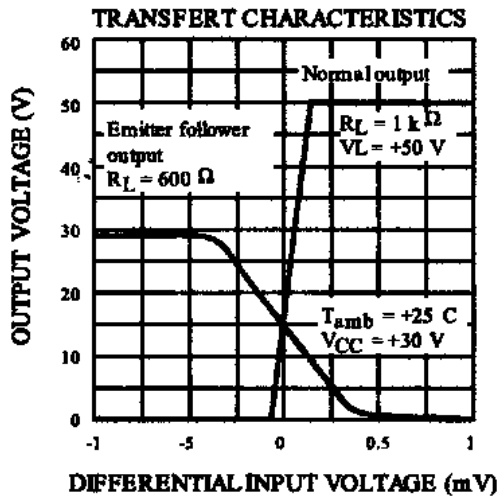


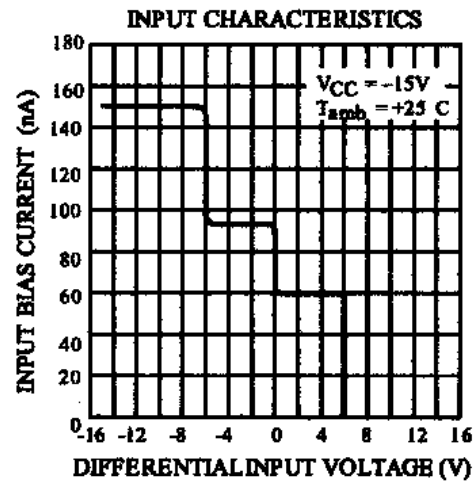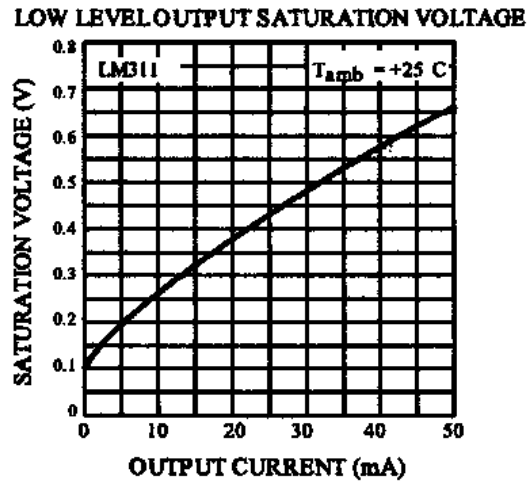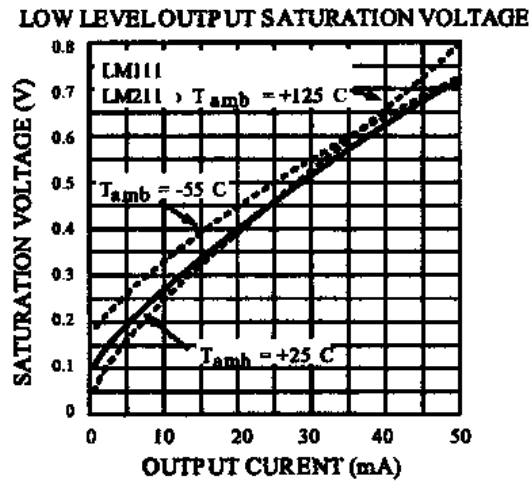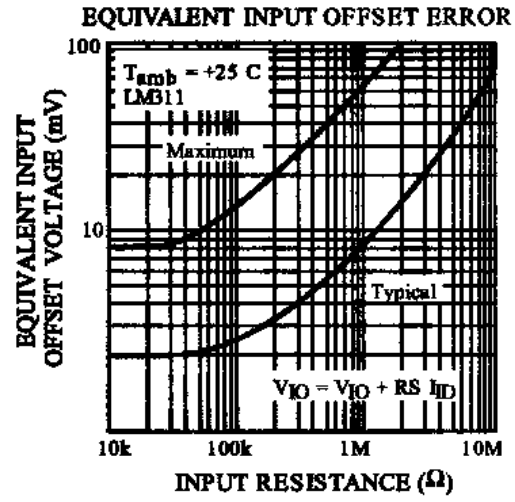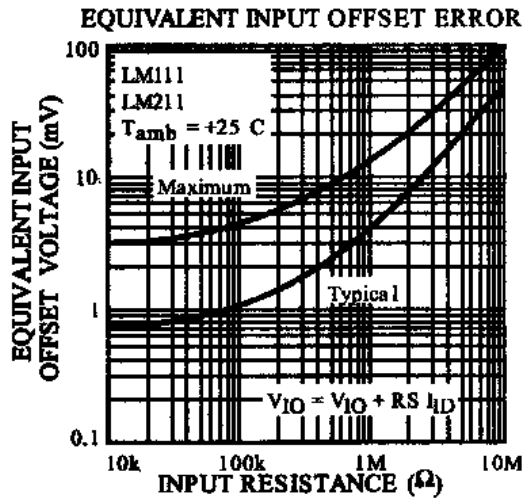

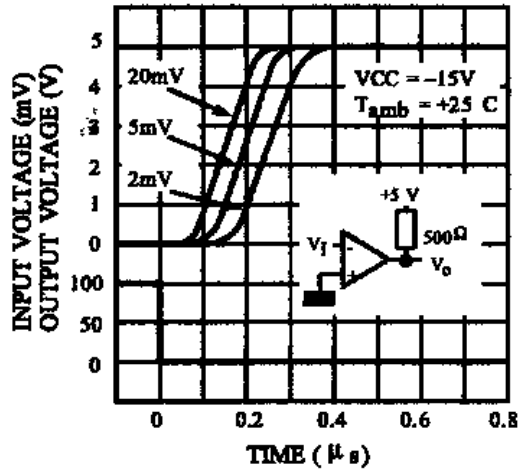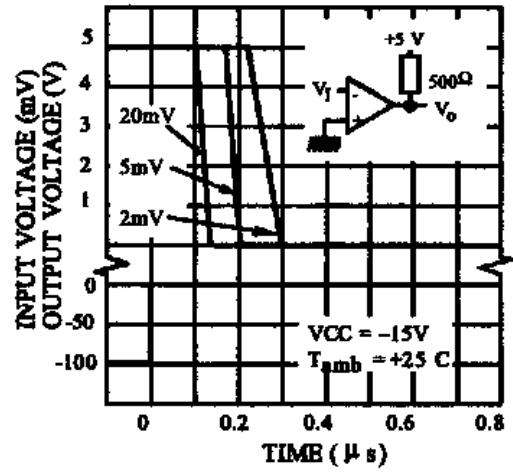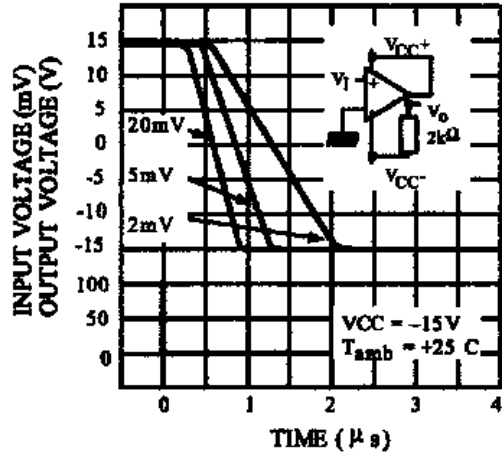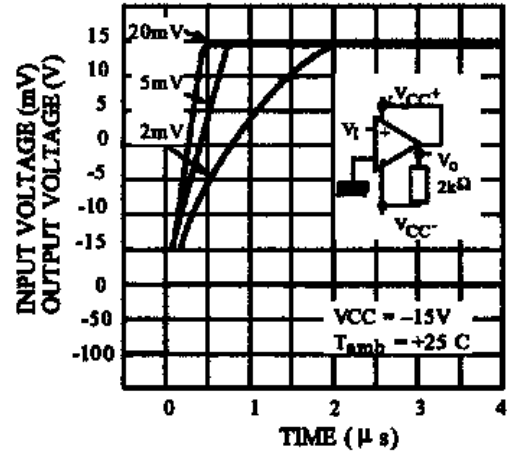RESPONSE TIME FOR VARIOUS
INPUT OVERDRIVESRESPONSE TIME FOR VARIOUS
INPUT OVERDRIVESRESPONSE TIME FOR VARIOUS
INPUT OVERDRIVESRESPONSE TIME FOR VARIOUS
INPUT OVERDRIVES


TYPICAL APPLICATIONS

CRYSTAL OSCILLATOR


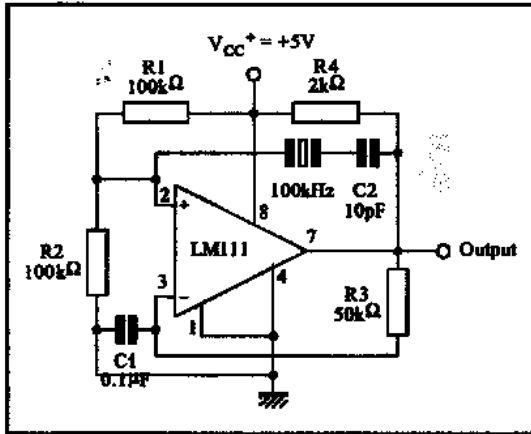


100KHz FREE RUNNING MULTIVIBRATOR


LOW VOLTAGE ADJUSTABLE REFERENCE SUPPLY

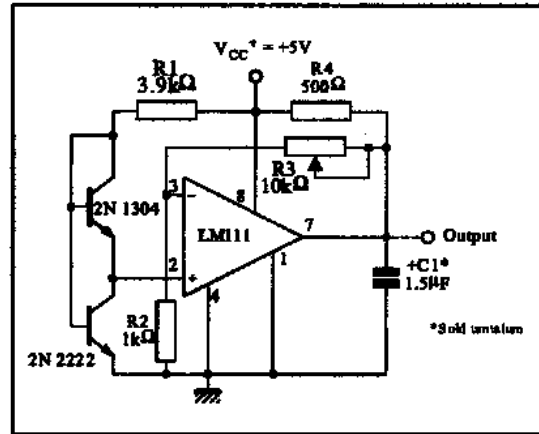

TTL INTERFACE WITH HIGH LEVEL LOGIC

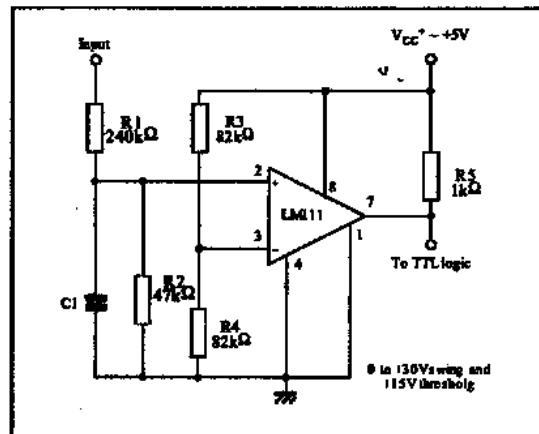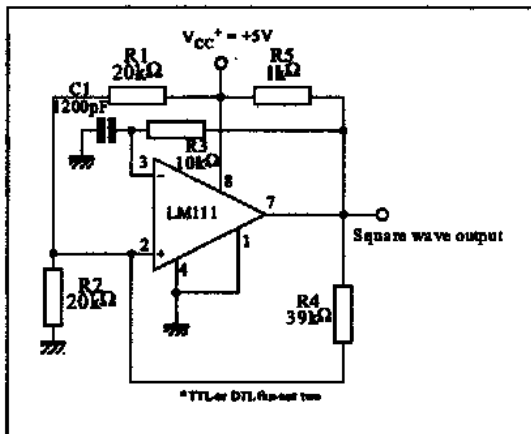


AUXILIARY CIRCUITS

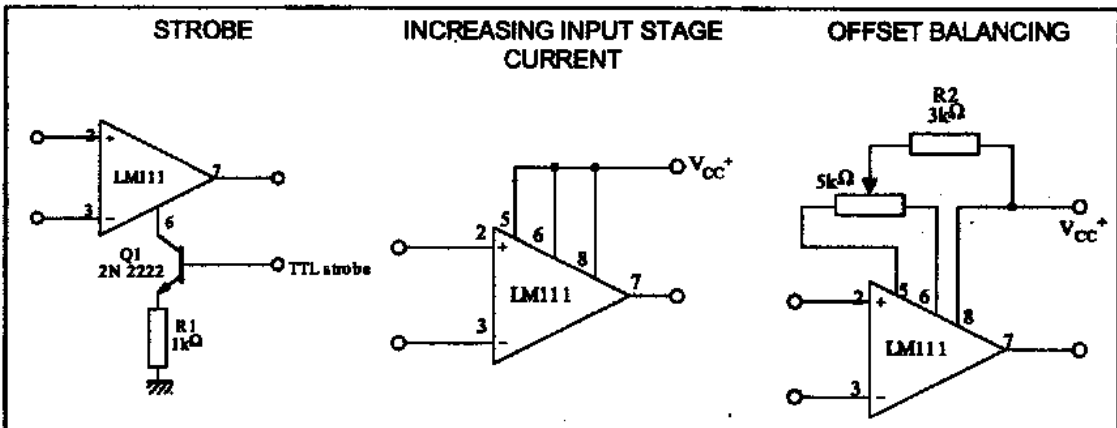


PACKAGE MECHANICAL DATA

8 PINS - PLASTIC DIP

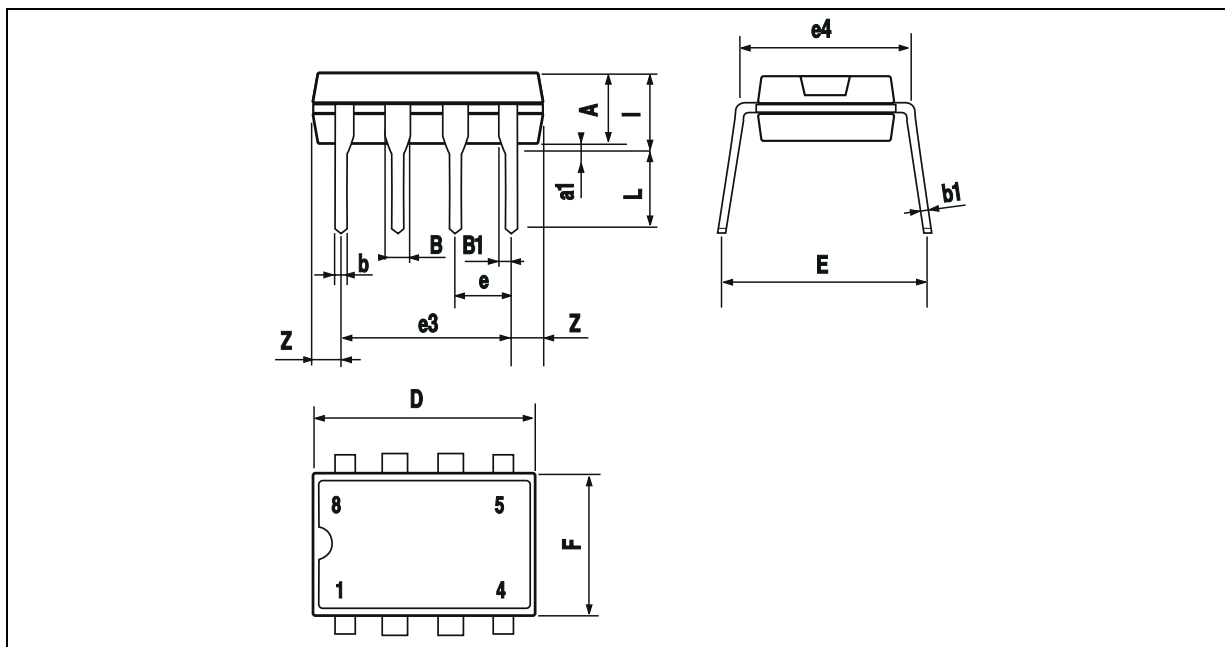

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		3.32			0.131	
a1	0.51			0.020		
B	1.15		1.65	0.045		0.065
b	0.356		0.55	0.014		0.022
b1	0.204		0.304	0.008		0.012
D			10.92			0.430
E	7.95		9.75	0.313		0.384
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			6.6			0.260
i			5.08			0.200
L	3.18		3.81	0.125		0.150
Z			1.52			0.060

PACKAGE MECHANICAL DATA **8 PINS - PLASTIC MICROPACKAGE (SO)**

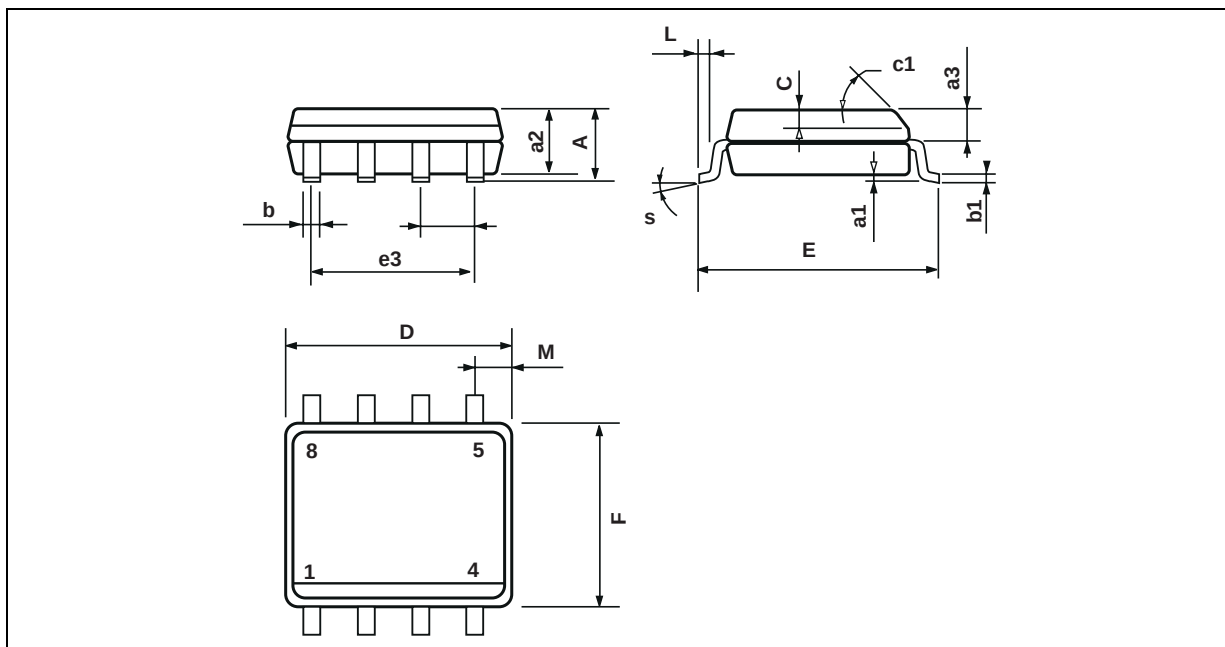

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
a1	0.1		0.25	0.004		0.010
a2			1.65			0.065
a3	0.65		0.85	0.026		0.033
b	0.35		0.48	0.014		0.019
b1	0.19		0.25	0.007		0.010
C	0.25		0.5	0.010		0.020
c1	45° (typ.)					
D	4.8		5.0	0.189		0.197
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.150		0.157
L	0.4		1.27	0.016		0.050
M			0.6			0.024
S	8° (max.)					

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved
 STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia
 Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

© <http://www.st.com>

